PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 44278 IMPELLER PATTERN NO. 43469	THRUST CONSTANT 3.1 WR² .31 LB. FT²/STAGE	PUMP SHAFT DIAM. 1½" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 15"

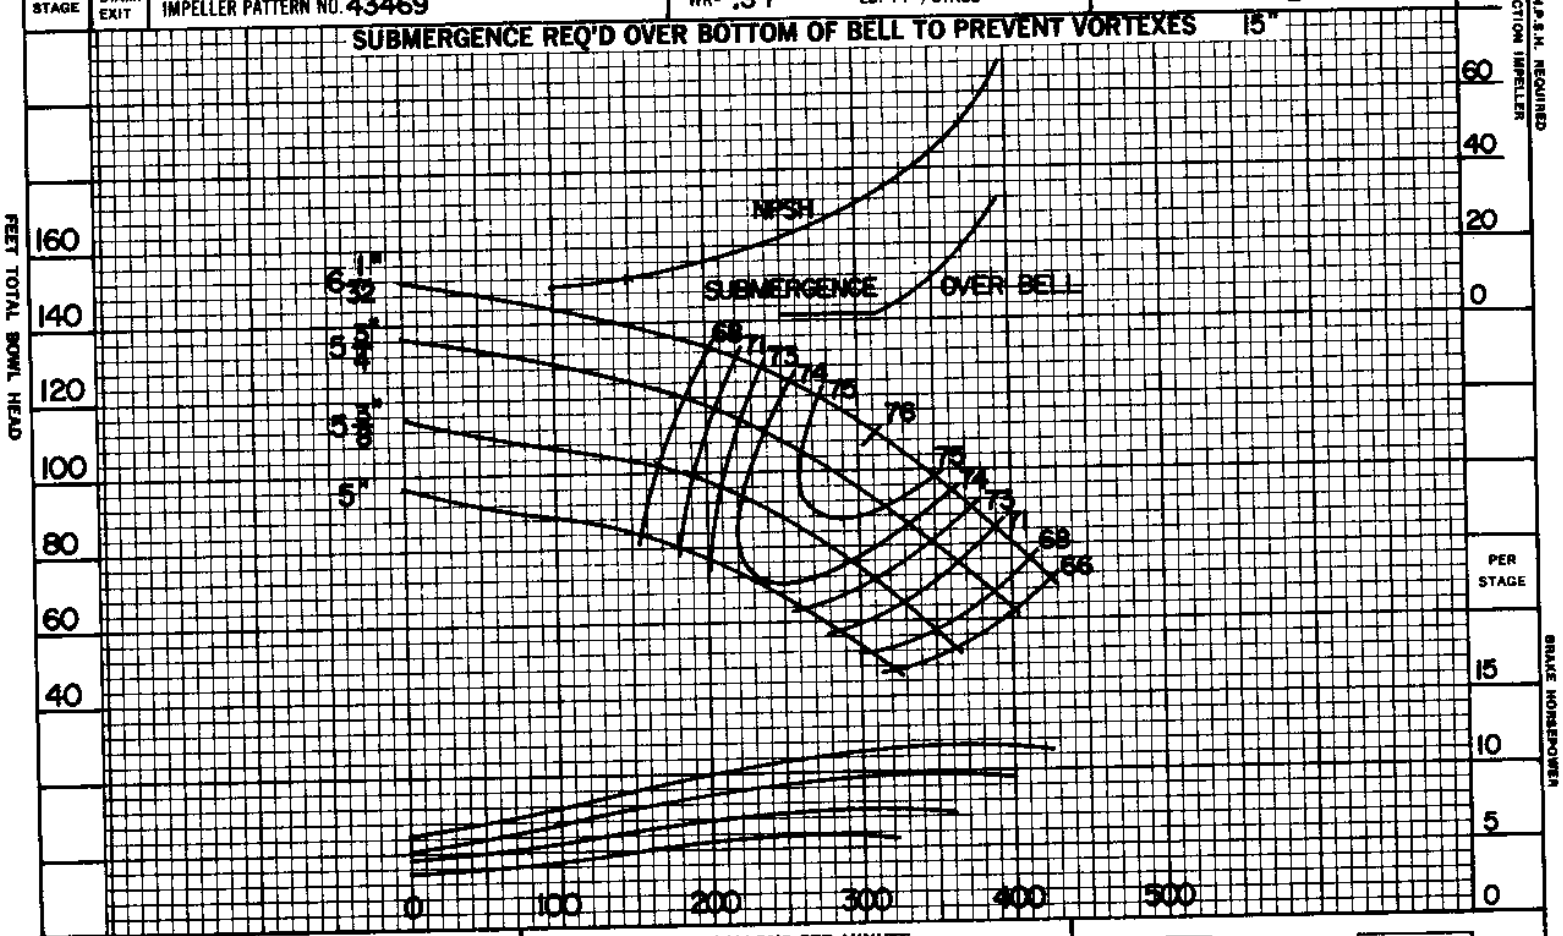

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 5 STAGES MULTIPLY HD. & EFF. BY .99

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

8 DLC
IMPELLER – BRONZE

3550 RPM
BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2656

JP-341A